
High Power

100-240V



- IP20 Damp Location
- Aluminum housing/plastic coating
- PC Diffuser
- Available with E27-E40 adaptor
- Working temperature at -20˚C~40˚C
- Recommended use: 10-12 hours /day
  To avoid product damage or voided warranty
- Indoor Use

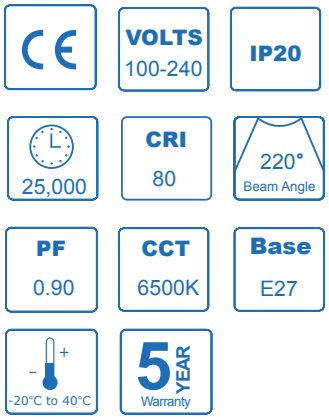

	Item	W	CCT	Voltage	Lumens	PF	Diameter	Length
 **E27**	AL572396	20	6500K	100-240V	2000lm	.50	80mm	139mm
	AL572397	30	6500K	100-240V	3000lm	.90	100mm	171mm
	AL572398	40	6500K	100-240V	4000lm	.90	120mm	195mm
	AL572399	50	6500K	100-240V	5000lm	.90	140mm	221mm

Ordering options

- To order PF .50 add “5” to the end of item code (before “S”)
- To order E40 adaptor for E27 base, add “S” to the end of item code



Notes

- ± 5mm range in height / ± 3mm range in diameter
- Lumen/power tolerance = up to 10%
- Beam angle tolerance = <10%
- 20w= PF 0.50

Packing information

Model	CBM (master)	Pieces per master	Master box (cm)
20w	0.0204	20	42.5 x 34.3 x 16.5
30w	0.0450	20	53 x 42.5 x 20
40w	0.0693	20	63.5 x 50.8 x 21.5
50w	0.1051	20	73 x 58.8 x 24.5

With E40 Adapter= Same packin information