
americanlite®

Insulated Multi-Tap Connectors Single Sided Entry

UL LISTED E541766







AL606004




AL606005








AL606005








AL606007


Model No		AL606004	AL606005	AL606006	AL606007
AWG Range		2- 14AWG	2- 14AWG	2- 14AWG	2- 14AWG
Conductor Type		Both Aluminum and Copper			
Body Material		6061-T6 Aluminum			
Number of wires connected		One Wire Per Terminal			
Strip Length(In.)		1.094	1.094	1.094	1.094
Insulating Sleeve		PVC			
Size (In.)	L	1.35	1.35	1.91	2.46
	W	1.57	1.44	1.44	1.57
	H	1.22	1.22	1.22	1.22
Ambient temperature		-10℃ -90℃			
Voltage withstand		2500Vac/1Min			

americanlite®

Insulated Multi-Tap Connectors Dual Sided Entry

UL LISTED E541766



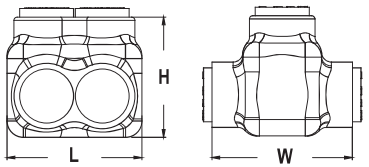



AL606044



AL606045



AL606046



AL606047

Model No		AL606044	AL606045	AL606046	AL606047
AWG Range		2- 14AWG	2- 14AWG	2- 14AWG	2- 14AWG
Conductor Type		Both Aluminum and Copper			
Body Material		6061-T6 Aluminum			
Number of wires connected		One Wire Per Terminal			
Strip Length(In.)		1.094	1.094	1.094	1.094
Insulating Sleeve		PVC			
Size (In.)	L	2.44	1.35	1.90	2.46
	W	0.8	1.57	1.57	1.57
	H	1.22	1.22	1.22	1.22
Ambient temperature		-10℃ -90℃			
Voltage withstand		2500Vac/1Min			