
americanlite®

Insulated Multi-Tap Connectors Single Sided Entry

UL LISTED E541766






AL606008




AL606009

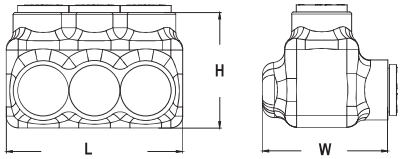



AL606010

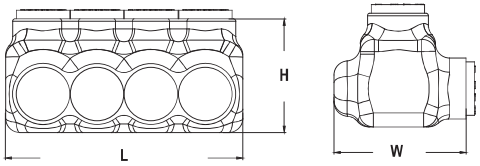




AL606011


Model No		AL606008	AL606009	AL606010	AL606011
AWG Range		1/0-14WG	1/0-14WG	1/0-14WG	1/0-14WG
Conductor Type		Both Aluminum and Copper			
Body Material		6061-T6 Aluminum			
Number of wires connected		One Wire Per Terminal			
Strip Length(In.)		1.339	1.339	1.339	1.339
Insulating Sleeve		PVC			
Size (In.)	L	1.62	1.62	2.30	2.96
	W	1.70	1.70	1.70	1.70
	H	1.45	1.45	1.45	1.49
Ambient temperature		-10℃ -90℃			
Voltage withstand		2500Vac/1Min			

americanlite®

Insulated Multi-Tap Connectors Dual Sided Entry

UL LISTED E541766

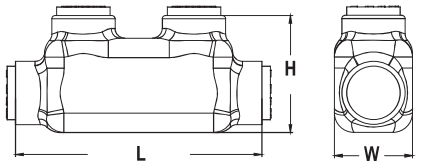

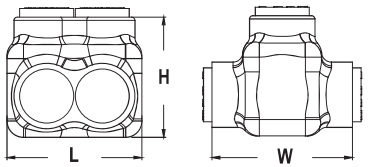



AL606048



AL606049



AL606050



AL606051

Model No		AL606048	AL606049	AL606050	AL606051
AWG Range		1/0- 14AWG	1/0- 14AWG	1/0- 14AWG	1/0- 14WG
Conductor Type		Both Aluminum and Copper			
Body Material		6061-T6 Aluminum			
Number of wires connected		One Wire Per Terminal			
Strip Length(In.)		1.480	1.339	1.339	1.154
Insulating Sleeve		PVC			
Size (In.)	L	2.99	1.63	2.30	2.93
	W	0.95	1.7	1.7	1.65
	H	1.42	1.45	1.45	1.52
Ambient temperature		-10℃ -90℃			
Voltage withstand		2500Vac/1Min			