



WPX™

28w/40w/60w Single Power & Power Selectable

LISTED | DLC PREMIUM | RoHS

Wet Location	IP65	IK07
LM80	LM79	Lumens up to 140 LxW
Photocell	100x87° Beam Angle	VOLTS 120-277
Power Selectable	CCT 4K-65K	THD ≤20%
CRI >80	PF ≥.90	Up to 6KV Surge Protection
DIM 0-10V	Up to 100,000	-40°C-50°C
5 YEAR Warranty		

The conventional Wallpack luminaire is now offered at the most affordable price and with the most cutting-edge LED technology. The WPX™ luminaire gives a conventional appearance and is powered by High-performance LEDs. It has a traditional dayform. Traditional architecture eliminates the need to repaint by enabling a seamless upgrade from HID.


The WPX™ luminaire is strong yet economical, able to replace up to a 400w HID light while reducing energy expenses by up to 86%. The WPX™ removes the need for frequent lamp and ballast replacements associated with conventional technologies by providing an expected service life of more than 20 years.

The durable cast-aluminum housing of the WPX™ luminaire is painted with bronze polyester powder paint for long-lasting durability. Gaskets are used to seal castings to prevent the entry of outside pollutants. Designed for optimum lighting distribution, homogeneity, and fixture spacing, the impact-resistant prismatic PC lens. Modern UL 0-10V dimming driver, Lumileds 2835 LED chips, up to 6KV surge protection, and an integrated photocell are all included as standard. One of the most comprehensive LED wallpacks on the market, WPX™ luminaire offers options like Power Selectable and external SPD 10KV or 20KV.

The housing can be wired through either of three easy 1/2" threaded conduit entrance hubs or mounted directly over a conventional 4" outlet box (by others).

When only a fraction of your building's wall packs need to be replaced, the conventional shape aids in maintaining architectural aesthetics. Wherever lighting is most needed, such as on carports, loading docks, sidewalks, entrances, roads, pathways, and around the perimeters of buildings, WPX™ luminaire offer illumination.

Dimensions (mm)

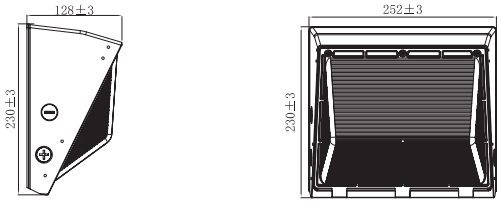

Ordering information

Single Power

Model	Power	Lumens
AL674470	28w	3920
AL674471	40w	5600
AL674472	60w	8400

Power Select

Model	Power Select	Lumens
AL674473	28w/22w/10w	3920/3080/1400
AL674474	40w/30w/20w	5600/4200/2800
AL674475	60w/45w/30w	8400/6300/4200

CCT		Options	
Blank	5000K	**S1**	SPD 10KV
5	5700K	**S2**	SPD 20KV
4	4000K		

Notes

- Lumen Tolerance up to 10%
- Lumens based on 5000K (140 l/w): 5700K= 141 l/w, 4000K= 139 l/w
- LEDS = Lumileds 2835
- DLC = N/A with Power Selectable
- Driver Brand: 28w/40w = HBE 60w = Becky
- Surge Protection: 28w/40w =L-N 2.5KV, L&N-PE 2.5KV 60w =L-N: 4kV, L&N-E: 6kV
- 28w/40w 100,000 hours life @ Tc 65°C 60w 75,000 hours life @ Tc 65°C
- Hours Life: 28w/40w 100,000 hours life @ Tc 65°C 60w 75,000 hours life @ Tc 65°C
- SPD: 10KV = ZYS-P10A 20KV = ZYS-P20A
- Photocell = Standard (it can be bypassed)
- Total 3 1/2" entry KO's (1 each side & 1 back)

Packing information

Model	Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross Weight (KG)
28w/40w/60w	4	50 x 30 x 29	0.0435	7.4 / 7.8 / 7.8