LEDR5

americanlite®

STANDARD

UL LISTED | ALL LED | DAMP LOCATION

Lumens 205

130 min ER illumination



ILLUMINATION

- *Long lasting, efficient ultra-bright white LED lamp heads.*
- *Total watts 2.4 (12 LEDs per head) total 205 lumen output.*
- *High-performance chrome-plated metalized reflector and plastic lens for optimal light distribution.*
- *Adjustable LED lamp heads provide optimal center-to-center spacing.*

ELECTRICAL

- *Universal Voltage 120V-277V 50-60Hz*
- *Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.*
- *3.6V 1000mAH long-life, maintenance-free, rechargeable NiCd battery.*
- *Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for maximum 130-minute emergency illumination.*
- *Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.*
- *Low voltage battery disconnection preventing deep discharge damage to the battery.*

MOUNTING

- *Universal mounting plate with EZ quick connect for rapid installation.*
- *Suitable for wall or ceiling mount.*

HOUSING

- *Injection-molded, engineered grade 5VA flame retardant, high-impact resistant, thermoplastic in white finish. Flame retardant rating up to 850C.*


OPTIONS

- *STD: Self-diagnostic feature performs monthly and annual tests to ensure reliable operation and meet electrical and life safety codes.*

WARRANTY/LISTING

- *Five year warranty on all electronics and housing. Batteries three years.*
- *UL listed for indoor damp locations. (0°C – 40°C)*
- *Meets UL924, NFPA 101, NEC and OSHA ilumination standards.*

DIMENSIONS (MM)

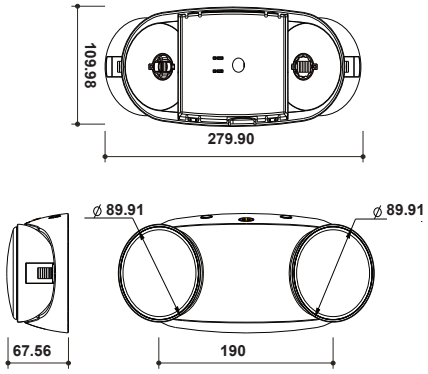

ORDERING INFORMATION

Model	Housing Color	Options
LEDR5	White	SDT Self diagnostic

PACKING INFORMATION

Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross weight (Kg)
6	30x23.5x24.5	0.0172	3.2

NOTES:

- AC input and battery output include fuse to prevent fire from overload current. Once current is overloaded the fuse will break and needs to be replaced by a professional.
- Damp location is only for low or high temperature operation not for dust-proof or water-proof.
- Batteries must be charged every 18 months to ensure product conservation.
- Specifications and dimensions subject to change without notice.