ALUMINUM EDGELITE EXIT SIGN



STANDARD

UL LISTED · ALL LED · DAMP LOCATION

ILLUMINATION

- *Ultra-bright, energy efficient, long-life Red or Green LED.*
- *UV-stabalized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.*
- *Double face utilizes factory installed silver or white mylar background panel.*

ELECTRICAL

- *Dual 120/277 voltage standard.*
- *Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.*
- *3.6V/600mAH long life, maintenance-free, rechargeable NiCd battery.*
- *Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 180-minutes emergency illumination.*
- *Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.*

MOUNTING

- *Aluminum mounting canopy included for top, end or back mount.*


HOUSING

- *Premium-grade, extruded aluminum housing (also available in black or white powder-coated finishes).*
- *Self-adhesive chevron appliques and guide template provided for directional indication.*

WARRANTY

- *Five year warranty on all electronics and housing. Batteries 3 years.*
- *Meets UL924, NFPA101 Life Safety Code and NEC*
- *UL Listed for damp locations (0°C-50°C)*

DIMENSIONS

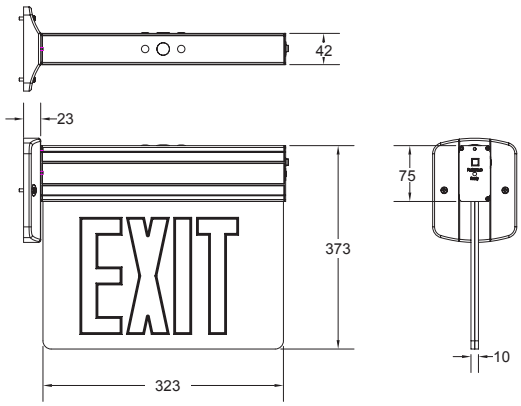

ORDERING INFORMATION

Model	No. of faces	Letter	Panel	Housing	Battery	Options
AELXTEU	1 Single Face	R Red	C Clear*	A Aluminum	EM Battery Back up	S Salida
	2 Double Face	G Green	M Mirror			
			W White			

NOTES:

* Single Face Only

PACKING INFORMATION

Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross weight (Kg)
10	41x37x25.5	0.0386	8.4

Specifications and dimensions subject to change without notice.