# ALUMINUM EDGELITE EXIT SIGN




*STANDARD*

UL LISTED · ALL LED · DAMP LOCATION

## ILLUMINATION

- *Ultra-bright, energy efficient, long-life Red or Green LED.*
- *UV-stabalized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.*
- *Double face utilizes factory installed silver or white mylar background panel.*

## ELECTRICAL

- *Dual 120/277 voltage standard.*
- *Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.*
- *3.6V/600mAH long life, maintenance-free, rechargeable NiCd battery.*
- *Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 180-minutes emergency illumination.*
- *Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.*

## MOUNTING

- *Aluminum mounting canopy included for top, end or back mount.*


## HOUSING

- *Premium-grade, extruded aluminum housing (also available in black or white powder-coated finishes).*
- *Self-adhesive chevron appliques and guide template provided for directional indication.*

## WARRANTY

- *Five year warranty on all electronics and housing. Batteries 3 years.*
- *Meets UL924, NFPA101 Life Safety Code and NEC*
- *UL Listed for damp locations (0°C-50°C)*

## DIMENSIONS

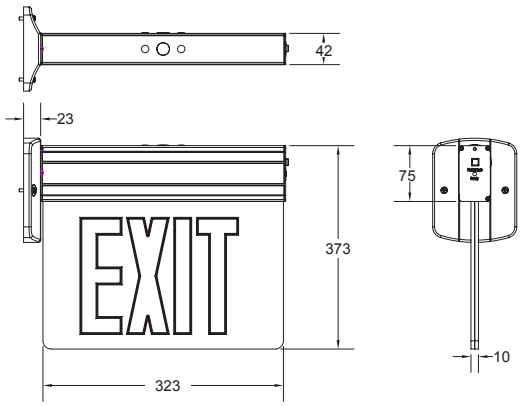


## ORDERING INFORMATION

| Model | No. of faces | Letter | Panel | Housing | Battery | Options |
|---|---|---|---|---|---|---|
| AELXTEU | 1 Single Face | R Red | C Clear* | A Aluminum | EM Battery Back up | S Salida |
| | 2 Double Face | G Green | M Mirror | | | |
| | | | W White | | | |

NOTES:

* Single Face Only

## PACKING INFORMATION

| Pieces per master | Box Dimensions (cm) | CBM (Master) | Gross weight (Kg) |
|---|---|---|---|
| 10 | 41x37x25.5 | 0.0386 | 8.4 |

Specifications and dimensions subject to change without notice.