

americanlite®

Parking and Canopy

APG™

35w/55w



CERTIFIED | DLC LISTED

WET LOCATION	IP65	IK09
LM80	Lumens 130LxW	DIM 0-10V
160° Beam Angle	Tilt 120°	CCT 5000K
VOLTS 100-277	4kV* Surge Protection	PF >.90
CRI >80	THD 20%	-20°C-45°C
50,000	5 YEAR Warranty	

Americanlite® legacy continues with APG™ Series, the most advanced garage fixture in the market. The APG™ Series provides effective solutions for meeting the dynamics and challenges of parking garage applications including IES recommendations. We have created the most versatile garage fixture, with 4 adjustable side lenses to address the light where you need it, reducing the total amount of fixtures compared to conventional garage fixtures.

The Central lens (160 beam), reduces glare providing exceptional visual comfort and performance, The 4 optics with a 120˚ tilt angle, provide the ability to control the spread and increase the lumen x sqf, making the APG™ Series the ideal solution for parking garage and canopy applications.

Rugged die-cast aluminum construction and gasketed housing make the APG™ luminaire virtually impenetrable to contaminants (Wet location / IP65 rated). Integrated heatsink fins and isolated power supply compartment allows cooler operation and maximum LED operating life. Impact resistant clear prismatic polycarbonate lens (UL746C recognized) provides uniform light distribution. 1-10V UL dimming driver, a SPD up to 4KV and a wide range 100-277v. combining the latest LED technology (Lumileds) and options such as Motion Sensor makes APG™ luminaire a strong an versatile fixture, ready for high performance and energy savings.


The APG™ luminaire mounts to a recessed junction box or surface mount with 4 (1/2") conduit entry points. Can be pendant mounted with NPT pendant stem provided by others.

The APG™ luminaire provides years of maintenance-free garage illumination applications.


Dimensions (mm)

4 Rotating heads <120°





with ER Driver

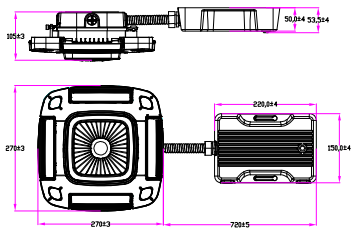

Ordering information

Model	Power	Lumens	CCT		Options
AL574489	35w	4550	Blank	5000K	MS Motion Sensor (MC605V D99)
AL574490	55w	7150	57	5700K	RC Remote control (MH10)
			4	4000K	E1 15w ER driver (BLD-CM20E-480800)
			3	3000K	

Notes

- Surge Protection:
  4kV for 55w
  2kV for 35w
- Housing wall thickness: >1.2mm
- Salt chamber test: 168 hours

Packing information

Model	Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross Weight (KG)
35w /55w	2	32 x 30.5 x 33	0.0322	5.8