



DCX Pro™ Series

CCT & Power Selectable
4"/6"/8"/10"
CRI 80

Wet Location	IK05	LM80
DIM 0-10V	5CCT Selectable 27K-5K	Power Selectable
Lumens up to 133 lxw	VOLTS 100-277	CRI 80
PF ≥ .90	THD <15%	1KV Surge Protection
95° Beam Angle	SCDM < 6	UGR > 22
-20°C~40°C	50,000	5 YEAR Warranty


The DCX Pro™ Series is everything you need in a downlight at an affordable price. Whether it's the seamless install from-below design, abundant energy savings or maintaining glare-free aesthetics, DCX Pro™ is the perfect solution for any renovation, remodel or new construction project. To top it off, DCX Pro™ has a broad offering of aperture sizes, drivers, accessories, and switchable CCTs and lumens.

Americanlite® innovative Power & CCT Selectable feature incorporates a switch on each fixture for simple power & color temperature adjustment. Not 3…. but 5 different CCT choices for every single application (2700-3000-3500-4000-5000K) and 3 different wattages. Too warm or too cool? too bright? Simply toggle the integrated switches to your desired setting andyou are done! Whatever your application, the DCX Pro™ Series luminaires are sure to give you the feel and flexibility that you need. More flexibility? DCX Pro™ Series fixtures are dimmable 0-10V driver with a 100-277v range.

The DCX Pro™ Series allows for easy retrofit, remodel or new construction installation from below the ceiling as the perfect choice when you have joists or duct work in the way. Engineered with high performance drivers and lighting controls to deliver a sustainable and long-lasting downlighting solution. They are wet location listed, making them ideal for use in a breadth of outdoor residential, hospitality, light commercial and multi-family applications.

The DCX Pro™ Series is the ideal specification-grade architectural downlighting. It delivers exceptional visual comfort and optical control, extraordinary mechanical precision, installation efficiency and future proofing.

Dimensions (mm)

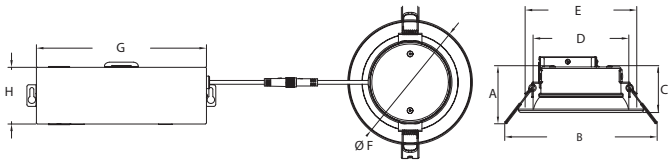

						Cut Out			
Power	Size	A	B	C	D	E	F	G	H
15w	4"	61.5	161.4	49.6	101.2	118	132	180	60
18w	6"	60.3	209	57.1	125.8	140	187	180	60
30w	8"	84.6	259.1	81.4	180	185	220	180	85.6
38w	10"	82.8	311	81.4	221.2	235	271	180	85.6

Ordering information

Item	Power	Size	2700K	3000K	3500K	4000K	5000K
AL582535	15w	4"	1543	1648	1724	1727	1627
	11w		1160	1229	1275	1307	1266
	7w		745	783	807	816	811
AL582536	18w	6"	1809	1938	2057	2050	1933
	14w		1474	1569	1637	1648	1588
	10w		1050	1107	1148	1159	1143
AL582537	20w	6"	1930	2074	2192	2187	2040
	16w		1631	1745	1832	1838	1750
	12w		1333	1415	1473	1488	1443
AL582538	30w	8"	2674	2858	3054	3078	2889
	24w		2417	2547	2703	2732	2589
	18w		1862	1955	2048	2076	2025
AL582539	38w	10"	3903	4189	4462	4467	4164
	30w		3311	3539	3740	3763	3584
	22w		2563	2705	2859	2874	2786

Options

ER 8w ER Battery

Notes

- Lumen tolerance < 10%
- LED Chip Brand = Runlite
- ER Battery 90 min = BLD-HM08D-YYY
- 277V lumens = 7-12% more than 120V
- AL582537: No ETL
- Complies with UL 1598

Packing information

Model	CBM (Master)	Pieces per master	Box Dimensions (CM)	Gross weight (KGS)
4"	0.0607	16	43.4 x 39.4 x 35.5	8.8
6"	0.0541	12	40.4 x 40 x 33.5	8
8"	0.0644	8	51.8 x 48.8 x 25.5	7.93
10"	0.0941	8	61.8 x 58.8 x 25.9	7.96