
LED Emergency Driver
(for external driver)

americanlite®

8w

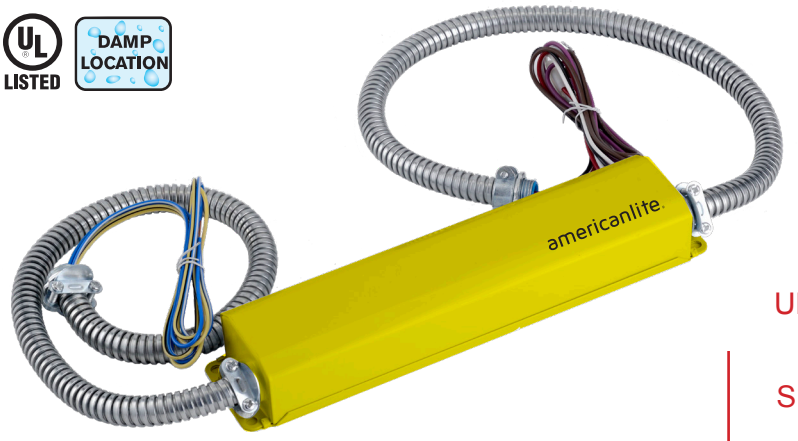


UL Listed for factory installation or field installation

PRODUCT OVERVIEW

- To be use with fixtures with external drive
- Constant power output - Provides constant wattage to the LED array, preventing degradation of emergency illumination for the required runtime
- Suitable for enclosed and gasket fixtures
- 0° to 50°C indoor damp location listed
- UL listed for field installation
- Meets UL924
- Durable heavy duty steel housing
- Innovative, easy installation in minutes
- 120-277VAC/50-60Hz universal voltage operation
- Built-in Nickel cadmium battery for minimum 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator


DIMENSIONS (MM)

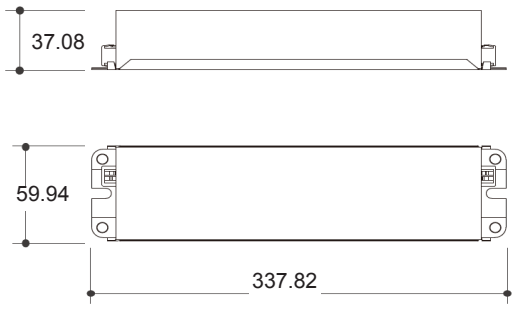

SPECIFICATIONS

Mode of Operation	**Works with external driver fixtures only**
Input Wattage	5.5W
Input Current	40-50mA
Output Voltage	3-60VDC
Output Power	8W Max
Battery	6V4000mAh Ni-Cad
Max Charge Current (mA)	420mA
Max Discharge Current (mA)	2200mA
Maximum Lumen Output	8w x lumen/watt of the fixture
Working Temperature	0°C-50°C

WIRING DIAGRAM

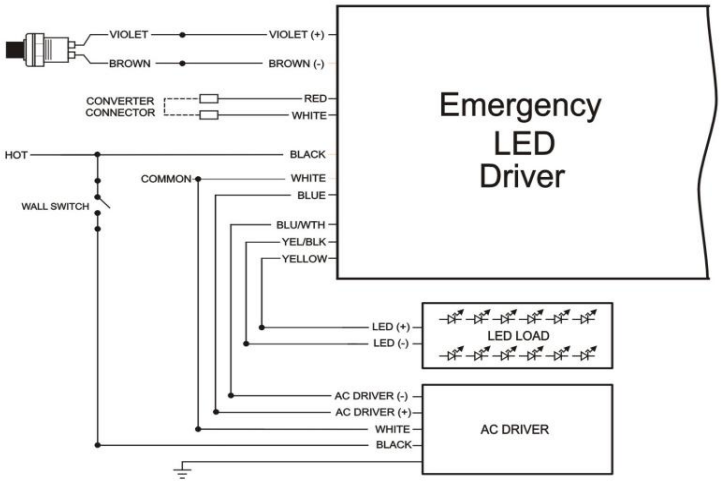

Batteries should be installed within a year. Batteries must be tested and recharged at least once every 18 months to maintain proper function and avoid loss of warranty.

ORDERING INFORMATION

Model	Packing information	Option
AL585008	40 x 25 x 15.5 cm / 6 pcs per master / G.W. 8.3 / N.W. 7.3KGS	Without conduit, add “X” after code