



WALL PLATE INCLUDED

The **AL601306** Self-Testing GFCI Receptacle with Combination Switch offers advanced protection and convenience in one device. Featuring automatic self-testing technology, tamper resistant shutters, and an integrated switch, it is the smart choice for residential and commercial applications.

AUTO SELF-TEST
Automatically performs an internal self-test to ensure continuous protection.

5 mA GROUND FAULT PROTECTION
5 mA ground fault protection helps reduce the risk of electrical shock.

TAMPER RESISTANT
Built-in shutters help prevent unintended insertion of foreign objects for increased safety.

LED INDICATOR
Red LED indicates GFCI status and helps with troubleshooting at a glance.

COMBINATION SWITCH
Integrated SPST switch controls connected lighting or other electrical loads.

cETLus LISTED
Meets UL 943 and CSA C22.2 No. 144.1 safety standards.


ELECTRICAL SPECIFICATIONS

Receptacle Rating	15A, 125VAC, 60Hz
Switch Rating	10A, 125VAC, 60Hz (1800W Maximum @ 120VAC)
Ground Fault Trip Level	5 mA ± 1 mA
Trip Time	< 25 ms
Short Circuit Current Rating	10 kA
Wire Range	12 – 14 AWG
Terminal Type	Back and Side Wired
Torque Range	14 – 18 in-lbs
Environmental Operating Temperature	-35°C to 66°C (Maximum Continuous)
Dielectric Voltage	1250 VAC

CONSTRUCTION

Body	PC (Polycarbonate)
Enclosure	PC (Polycarbonate)
Terminal Contacts	Copper Alloy
Mounting Yoke	Zinc Plated Steel
Self-Grounding Clip	Stainless Steel
Flame Rating	UL 94 V-2
Tamper Resistant Shutter	PC (Polycarbonate)
Color	Light Almond

DIMENSIONS

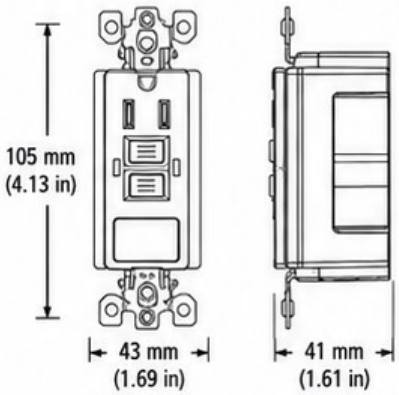

All dimensions are ±1 mm.

COMPLIANCE & STANDARDS

- cETLus Listed
- Conforms to UL 943
- Conforms to CSA C22.2 No. 144.1
- NEMA 5-15R
- RoHS Compliant

ORDERING INFORMATION

Model	AL601306
Description	15A/125V GFCI Receptacle with Combination Switch
Color	Light Almond
UPC	019813196068
Country of Origin	China

15A/125V RECEPTACLE

10A/125V SWITCH

RESIDENTIAL & COMMERCIAL USE

BACK & SIDE WIRED

RELIABLE PROTECTION

AVAILABLE COLORS

LIGHT ALMOND

WHITE

BLACK