

americanlite®

UDW™

7w/10w/15w/20w/30w
Power & CCT Select
RGB-W



Power & CCT Select



RGB-W

CERTIFIED | DLC PREMIUM

Wet Location | IP65 | IK05

LM80 | LM79 | Lumens Up to 140 LxW

Photocell | 60° Beam Angle | VOLTS 120-277

Power Selectable | CCT Selectable 3K-5K | RGB-W

THD ≤20% | CRI >80 | PF ≥.90

DIM 0-10V | 6KV Surge Protection | 50,000

-40°C-50°C | 5 YEAR Warranty

Outdoor wall mount lighting can create an inviting atmosphere by highlighting features of a building or structure. Building mounted lights also assists in creating ambient light for pedestrians and increase safety by illuminating potential danger to passerby.


Add beauty and focus to modern or traditional structures with the Americanlite® UDW™ Series up/down wall mounted cylinder. The luminaire offers versatility with its sleek industrial vibe while adding depth and sparkle to the overall lighting scene. Featuring a minimalistic daytime aesthetic, groundbreaking Led Technology, Americanlite® UDW™ Series has wall light transformed, outdoor or indoor use.

UDW™ cylinder luminaire features Professional Grade components. Made of sturdy rust-resistant aluminum, with a paint specially designed for outdoor; 3 different color to choose. We have taken the time to develop one of the most advanced wall cylinders offering 2 great options: Power and CCT Selectable and RGB-W, to cover every single need your project and site may demand. We kept our deep vision for outdoor lighting long lasting products, offering a built in 6KV surge protection as standard.


With many different and challenging outdoor environments, outdoor lighting demands options. UDW™ cylinder luminaire elevates aesthetics, bringing together utility and style. Applications such as building entrances & perimeter lighting, side and rear exit doors, stairways and entry path, building lobby, schools, apartment buildings, residential, retail & commercial buildings.

Dimensions (mm)

Power & CCT Select

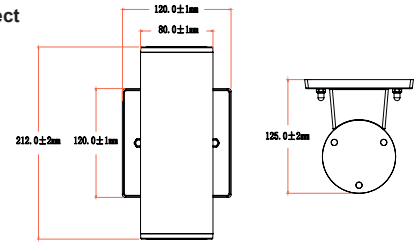

RGB-W

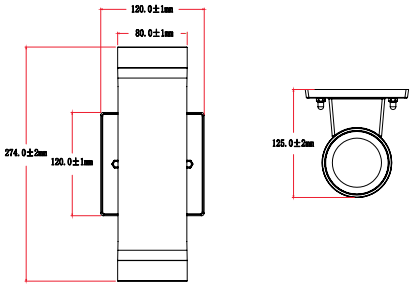

Ordering information

Model	Power Select	CCT Select	Lumens
AL682800	15w/10w/7w	3K/4K/5K	1830/1220/854
AL682801	30w/20w/10w	3K/4K/5K	4200/2800/1400

Options	
Blank	Bronze
B	Black
W	White
S1	10Kv SPD
S2	20Kv SPD

Model	Power	CCT	Lumens
AL682802	15w	RGB-W	300/255/120/720
AL682803	30w	RGB-W	600/510/240/1440

Options	
Blank	Bronze
B	Black
W	White

Notes

- Lumen Tolerance: ±10%
- Surge Protection: L-N:L-N :4KV,L&N-PE:6KV
- Driver brand = HBE
- BUG: B1-U5-G1
- Aluminum thickness : 2mm
- Paint thickness: 0.15mm
- PC lens thickness: 2.2mm
- Glass lens thickness: 3mm

Power & CCT Select

- Lumens based on 4000K
  15w= 5K 115 l/w, 4K 122 l/w, 3K 110 l/w
  30w= 5K 136 l/w, 4K 140 l/w, 3K 128 l/w
- LED Chips: Lumileds 2835
- Plug photocell included
- Lens: Glass

RGB-W

- Lumens:
- R=20 lxw, G=17 lxw, B=8 lxw, W=up to 48 lxw
- R+G+B=15000K
- LED Chips: Hongli 3030
- Lens: PC + Glass
- No dimmable
- 24 key remote control included

Packing information

Model	Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross Weight (KG)
Power & CCT	6	41 x 28 x 28	0.0280	10
RGBW	6	41 x 30 x 28	0.0340	9.2