


Acqua VTS Pro™

2’ / 4’ / 8’
Single CCT
CCT Selectable
CCT & Power Selectable
0-10V / DAL2

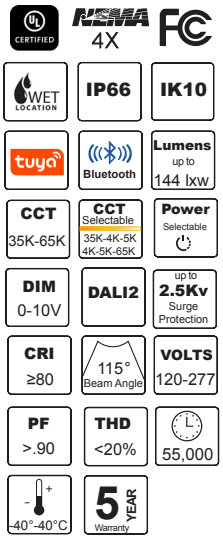

The Acqua VTS Pro™ Series is a professional LED industrial waterproof enclosed fixture that serves rugged to severe conditions as well as food service areas. Providing excellent illumination and made with the certifications required for rough service environments.


The Acqua VTS Pro™ Series features rugged and durable construction. Carries an IP66 rating that ensures integrity in damp and wet locations. Provides protection not just from ambient moisture, but also from jets of water. It is ideal for use in environments where dust, dirt, humidity or moisture is present.

The Acqua VTS Pro™ Series consists of a V1 grade PC housing & diffuser, IK10 grade impact resistant; stainless-steel clips are standard. Utilizes high-efficiency LED chip on metal core circuit boards, and UL 0-10V or DALI2 dimming driver with up to 2.5KV surge protection. Americanlite® innovative CCT and Power selectable systems allows color temperature and power adjustment to the specific needs, allowing multiple sets for every single project.

The Acqua VTS Pro™ Series was designed for industrial applications where smart, energy-efficient fixtures are desired. Install indoors or outdoors; use in cold or warm temperatures, mount in high or low spaces.

The Acqua VTS Pro™ Series is ideal for parking garages, exterior retail, mass transit, cold storage, food service areas or warehouses.

Dimensions (mm)



Ordering information

Single Power / Single CCT

Model	Power	Size	CCT	Lumens
AL686416	25w	2’	5000K	3350
AL686410	40w	4’	5000K	5360
AL686417	65w	8’	5000K	8710
AL686418	75w	8’	5000K	10050
AL686419	90w	8’	5000K	12060

CCT

Blank	5000K
6	6500K
4	4000K
3	3500K

Options

D	DALI2
EM	8w ER Driver
S	MW Sensor
BT	Bluetooth MW Sensor

Power Selectable / Single CCT

Model	Power	Size	CCT	Lumens
AL686412	30w/40w/50w	4’	5000K	4140/5400/6600

CCT

Blank	5000K
6	6500K
4	4000K
3	3500K

Options

D	DALI2
EM	8w ER Driver
S	MW Sensor
BT	Bluetooth MW Sensor

Single Power / CCT Selectable

Model	Power	Size	CCT	Lumens
AL686411	40w	4’	35K/4K/5K	5200/5600/5360
AL686414	40w	4’	4K/5K/65K	5200/5600/5360

Options

D	DALI2
EM	8w ER Driver
S	MW Sensor
BT	Bluetooth MW Sensor

Power Selectable / CCT

Model	Power	Size	CCT	Lumens
AL686420	15w	2’	35K/4K/5K	2010/2160/2070
	20w	2’	35K/4K/5K	2680/2880/2760
	25w	2’	35K/4K/5K	3350/3600/3450
AL686421	15w	4’	4K/5K/65K	2010/2160/2070
	20w	4’	4K/5K/65K	2680/2880/2760
	25w	4’	4K/5K/65K	3350/3600/3450
AL686422	65w	8’	35K/4K/5K	8710/9360/8970
	75w	8’	35K/4K/5K	10050/10800/10350
	90w	8’	35K/4K/5K	12060/12960/12420
AL686423	65w	8’	4K/5K/65K	8710/9360/8970
	75w	8’	4K/5K/65K	10050/10800/10350
	90w	8’	4K/5K/65K	12060/12960/12420

Model	Power	Size	CCT	Lumens
AL686413	30w	4’	35K/4K/5K	4020/4320/4140
	40w	4’	35K/4K/5K	5360/5760/5520
	50w	4’	35K/4K/5K	6700/7200/6900
AL686415	30w	4’	4K/5K/65K	4020/4320/4140
	40w	4’	4K/5K/65K	5360/5760/5520
	50w	4’	4K/5K/65K	6700/7200/6900

Options

D	DALI2
EM	8w ER Driver
S	MW Sensor
BT	Bluetooth MW Sensor

Notes

- Lumen/Power Tolerance up to 10%
- Single CCT Lumens Based on 5000K
- LED Chips: Seoul 3528
- MW Sensor: Merrytek #MC137D C
- Bluetooth Sensor: GEBC #ANT-5-4T-BLE-GE
- BT = External mount with adapter
- ER Driver: Billda #BLD-YM08S-056A
- DALI Driver =Lifud #LF-GSD065YI

- Single Power / Single CCT:
  35K=130lxw
  4K =132lxw
  5K =134lxw
- Single Power / CCT Select:
  35K/4K/5K: 4K/6K/65K:
  35K=130lxw 4K =130lxw
  4K =140lxw 5K =140lxw
  5K =134lxw 65K=134lxw

- Power Select / Single CCT
  35K=134lxw
  4K =136lxw
  5K =138lxw
- Power Select / CCT Select
  35K/4K/5K: 4K/6K/65K:
  35K=134lxw 4K =134lxw
  4K =144lxw 5K =144lxw
  5K =138lxw 65K=138lxw

- PC Housing: Thickness 2mm
- Opal PC Lens: Thickness 2mm
- Can connect up to 18 40w fixtures & 15 Power select fixtures with one 18AWG power cable
- Mounting clips included
- Stainless Steel Clips = 12 Total
- DALI2 Fixture Not available with BT or MW Sensor

Packing information

Model	Pieces per box	Master Box (cm)	CBM (box)	Gross weight (KGS)
All Models	9	123 x 33.5 x 29.5	0.1215	18.55