


SLWA™ Series

Adjustable Wallpack
2.5w / 3.5w / 4.5w

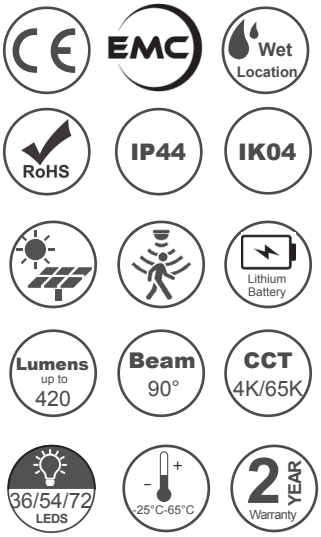

Whenever the sun rises each day, renewable energy is produced. Protecting investments, people, and property is one of the main purposes of outdoor lighting. Solar LED lighting improves visibility and safeguards against brownouts and blackouts.


Americanlite® Solar Led lights are always available when you need them and can be customized to almost any application. Its sophisticated design and slim construction use contemporary solar power and LED technology to give continuous performance and operational dependability for many years.

Americanlite® Solar lights are practical, dependable, and environmentally responsible because they use no energy and have an anti-UV housing and ultra bright lumen brilliance. There is no need for wiring, making them simple to install by yourself and maintenance-free.

SLWA™ Series LED Solar Motion activated Wall Light Illuminates with a bright up to 420 lumens. It unique adjustable design and the front and back double light as a butterfly makes the wall where it's placed more beautiful. The lights can be set up on any wall you want, allowing you to illuminate fencing, deck rails, steps, patios and more to provide security lighting where you need it most. 3 operational modes for different applications and weathers and a long viable distance for the light to shine.

Americanlite® Solar lights are Ideal for outside walls, pathways, fences, balconies, gardens, courtyards, farms, villas and many more.

Dimensions (mm)



Model	A	B	C
20w	130	190	103
40w	180	185	103
60w	230	185	103

Specifications

Working Power	2.5w / 3.5w / 4.5w
Solar Panel	2.5w=6v/2w / 3.5w= 6v/4w / 4.5w= 6v/6w
Lithium Battery 3.7v	2.5w=1500mAH / 3.5w=1800mAH / 4.5w=3000mAH

Charging time	4-6 Hrs
Working hrs	6-8 Hrs

Ordering information

Item	Watts	Lumens
AL771004	2.5w	200
AL771005	3.5w	350
AL771006	4.5w	420

CCT	
Blank	6500K
4	4000K

Notes

- LEDS: 2835 SMD
  2.5w=36 pcs / 3.5w=54 pcs / 4.5w=72 pcs
- 6-8 hours charge time in direct sunlight
- Radar Sensor
- Sensor Angle: 120°
- Sensor Distance 3-5m
- Recommended installation height < 4m
- Backlight is syncronized with front light
- Integrated On/OFF switch
- When operating at -10°C, the battery lifetime will be reduced
- Mounting screws included
- Operational modes:
  1. Lights off during the day, turns on when < 25 lux
  2. Once light is on, stand-by at 5% output, 100% when motion sensed. When battery charge is below 30% the light will automatically switch to 100% light on when motion sensed and light off after 10 secs of no motion
  3.

Packing information

Model	Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross Weight (KG)
2.5w	20	41.5 x 28.5 x 31	0.0366	8
3.5w	20	41.5 x 38.5 x 41	0.0655	10.5
4.5w	20	49.5 x 41.5 x 31	0.0636	13.4