


SLWC™ Series

Adjustable Compact Wallpack
2.5w / 3.5w / 4.5w

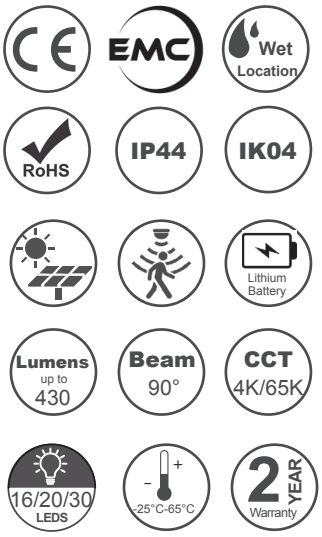

Whenever the sun rises each day, renewable energy is produced. Protecting investments, people, and property is one of the main purposes of outdoor lighting. Solar LED lighting improves visibility and safeguards against brownouts and blackouts.


Americanlite® Solar Led lights are always available when you need them and can be customized to almost any application. Its sophisticated design and slim construction use contemporary solar power and LED technology to give continuous performance and operational dependability for many years.

Americanlite® Solar lights are practical, dependable, and environmentally responsible because they use no energy and have an anti-UV housing and ultra bright lumen brilliance. There is no need for wiring, making them simple to install by yourself and maintenance-free.

SLWC™ Series LED Solar Motion activated Wall Light Illuminates with a bright up to 430 lumens. It unique compact & adjustable design and the front and back double light as a butterfly makes the wall where it's placed more beautiful. The lights can be set up on any wall you want, allowing you to illuminate fencing, deck rails, steps, patios and more to provide security lighting where you need it most. 3 operational modes for different applications and weathers and a long viable distance for the light to shine.

Americanlite® Solar lights are Ideal for outside walls, pathways, fences, balconies, gardens, courtyards, farms, villas and many more.

Dimensions (mm)

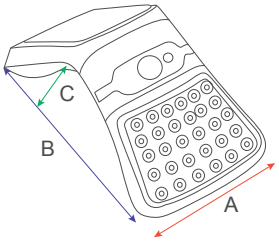

Model	A	B	C
20w	95	190	90
40w	115	220	110
60w	135	260	125

Specifications

Working Power	2.5w / 3.5w / 4.5w	Charging time	4-6 Hrs
Solar Panel	2.5w=6v/2w / 3.5w= 6v/4w / 4.5w= 6v/6w	Working hrs	6-8 Hrs
Lithium Battery 3.7v	2.5w=1500mAH / 3.5w=1800mAH / 4.5w=3000mAH		

Ordering information

Item	Watts	Lumens	CCT	
AL771007	2.5w	200	**Blank**	6500K
AL771008	3.5w	330	**4**	4000K
AL771009	4.5w	430		

Notes

- LEDS:2835 SMD
  2.5w=16 pcs / 3.5w=20 pcs / 4.5w=30 pcs
- 6-8 hours charge time in direct sunlight
- Turns on when sunlight is 25 lux
- Radar Sensor
- Sensor Angle: 120°
- Sensor Distance 3-5m
- Recommended installation height < 4m
- Backlight is syncronized with front light
- Integrated On/OFF switch
- When operating at -10°C, the battery lifetime will be reduced
- Mounting screws included
- Operational modes:
  1. Lights off during the day, turns on when < 25 lux
  2. Once light is on, stand-by at 5% output, 100% when motion sensed. When battery charge is below 30% the light will automatically switch to 100% light on when motion sensed and light off after 10 secs of no motion
  3. Brightness user setting: Hold down switch on for 100%, press a second time for 50%, press third time for 30%, then hold to turn off the light

Packing information

Model	Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross Weight (KG)
2.5w	20	44.5 x 22 x 28	0.0274	5.4
3.5w	20	50.5 x 24.5 x 33.5	0.0414	7.1
4.5w	20	56.5 x 28.5 x 38.5	0.0619	10