THIN THERMOPLASTIC BI-COLOR LED EXIT SIGN

STANDARD

UL LISTED | ALL LED | DAMP LOCATION



ILLUMINATION

- *Ultra bright, energy efficient, long life Red or Green LED.*
- *Red or Green Selectable. (Color Selectable switch to choose RED or GREEN) Interchangeable color lenses included.*

ELECTRICAL

- *Dual 120V/277V 50/60Hz*
- *Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.*
- *1.2V 1000mAH Long life, maintenance-free, rechargeable Ni-MH battery.*
- *Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.*
- *Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.*

MOUNTING

- *Easy snap mounting canopy included for top or end mount.*
- *Universal K/O pattern on back plate for wall mount..*


HOUSING

- *Injection-molded, thermoplastic ABS housing, UL 94V-0 fllame rating.*
- *White or Black*
- *Aesthetically pleasing, curved face, rounded corner design.*
- *Easy snap-out chevron directional indicators.*

WARRANTY/LISTING

- *Five year warranty on all electronics and housing. Batteries 3 years.*
- *Meets UL924, NFPA 101, NEC and OSHA ilumination standards.*
- *UL listed for indoor damp locations (0°- 40°C).*

DIMENSIONS (MM)

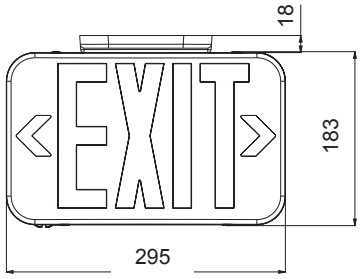

ORDERING INFORMATION

Model	No. of Faces	Housing Color	Battery	Options
EXRB	2 Universal Single / Double face	W White B Black	Blank Battery back up	S Salida SDT Self diagnostic

PACKING INFORMATION

Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross weight (Kg)
6	38.5x31.5x21.5	0.0260	6.8

NOTES:

- SDT=No UL Listed
- Damp location is only for low or high temperature
- Operation not for dust-proof or water-proof
- Batteries must be charged every 18 months to ensure product conservation.
- Specifications and dimensions subject to change without notice.