LED Recessed Emergency Unit



STANDARD | *OPTIONAL*

ILLUMINATION

- *Ultra-bright, energy efficient, long-life White LED adjustable lamp heads provide up to 50-ft center-to-center spacing with a 3-ft path of egress at 12-ft mounting height.*
- *1.0 watt (1 LED x 1.0 watt) per head.*
- *Unique all-inclusive lamp, reflector, and lens assembly.*

ELECTRICAL

- *Universal 120-277 voltage.*
- *Unique LED indicator light alerts occupant on battery condition (Red-normal, OFF-check battery).*
- *Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.*
- *4.8V long-life, maintenance-free, rechargeable Nickel Metal Hydride or Nickel Cadmium battery.*
- *Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.*
- *Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.*

MOUNTING

- *Bar hangers included are compatible with drywall or drop ceiling mount installations.*

HOUSING

- *Injection-molded, engineering grade, 5VA flame retardant, impact-resistant, thermoplastic in white or black finish.*
- *Injection-molded, engineering grade, 5VA flame retardant, thermoplastic oval and rectangle trim plates in white or black finish included.*


OPTIONS


- *SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.*

WARRANTY / LISTING

- *Five-year warranty on all electronics and housing. Battery pro rated for five years.*
- *Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.*
- *UL Listed for damp locations.(10°C – 40°C)*
- *Certified to CEC under title 20 regulations.*

DIMENSIONS

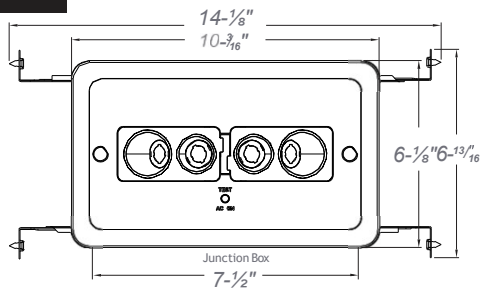

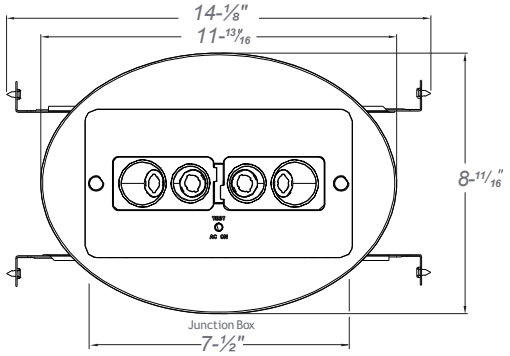

ORDERING INFORMATION

Sample Part Number: ***REMW***

MODEL	HOUSING COLOR		OPTIONS	
REM	*W*	*White*	*SDT*	*Self-Diagnostics*
	B	*Black*		